


# Reliable Self-Drilling Performance. Superior Marco Value.

Value drives everything we do. That's why our exclusive Weather-Tite™ System includes a full line of dependable QuikDrill™ Metal-To-Metal self-drilling fasteners for attaching metal roofs, sidewalls, and other metal panels with superior Marco performance. In fact, independent lab testing confirms Marco fasteners stand up to salt spray longer than other leading fasteners, giving you peace of mind for years to come.

## QuikDrill Fastener Features

- Higher crown for a better, tighter socket fit and quick installation
- Cupped head and HWH for improved pullover strength
- EPDM washer for a tight, sealed fit, standard
- Drill design that provides quick penetration and prevents point walking
- Durable 1 mil mechanical or 8 micron electroplating delivers exceptional lubricity, wear resistance and excellent durability

## Recommended Installation

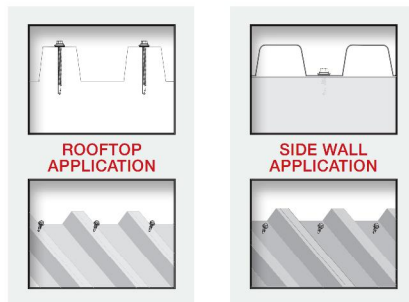

## Installation Tips

Always choose the appropriate fastener for the thickness and type of material to be drilled for any given application. To ensure optimum fastening performance, a 1900 to 2500 RPM screw gun rated 6 amps or more and fitted with a properly adjusted depth-locating nosepiece should be used. Sufficient pressure must be applied while screw gun is perpendicular to the working area. Overdriving fasteners can lead to leaks and other problems.



A lobe socket grips the fastener on 6 sides to prevent paint chipping which leads to rust. The nosepiece of the drill needs to be set to the correct height for proper washer installation.



Drive fastener level to metal surface.

The Marco  
Weather-Tite™  
System

Closure

Ventilation

Fasteners

Flashing

Sealants

Underlayment

Accessories